



Know-how in food processing!



Photo: NOCK Cortex CB 519

Derinding machines

Sturdy, reliable, proven

Perfect derinding results

The NOCK derinding machines persuade through their perfect derinding results. They operate with an ingenious geometry of the transport roller, blade holder, pressure device and infeed conveyor. The blade holder mounting is spring suspended so that the blade holder adjusts optimally to the thickness of the rind (skin). The pressure roller is spring suspended in all models and in most models it is also infinitely variable in height. This way all pieces such as belly of pork, backs of pork, top pieces of bacon, flat cuts, loins, hams and so on can be flawlessly derinded. Even freshly slaughtered meat can be easily processed. Bacon slabs can also be sliced.




The **NOCK ACTIVE SKIN GRIPPER® (ASG)** optionally available for all industrial models offers further important advantages:

- **Flawless first cut and perfect derinding also with very thin skinning**, hence less trimming
- **Noticeable increase of yield** and best rind quality
- **Longer durability of pressure wheels**, as less force is applied to the product (softer pressure springs)
- **Relief of the blade** due to less contact with the rind
- Thus amortization of the extra cost within a short space of time

Solid. Sturdy. Durable: The NOCK POWER PLATES®

The mechanically highly strained machine components such as drive, transport roller, blade holder and pressure device are mounted in **solid, 15 mm thick base plates**, the **NOCK POWER PLATES®**, which are located in the machine casing. Thousands of NOCK machines have since 1990 proven this construction. In comparison to the mounting of these parts in the casing like known from other brands the NOCK construction has deciding advantages:

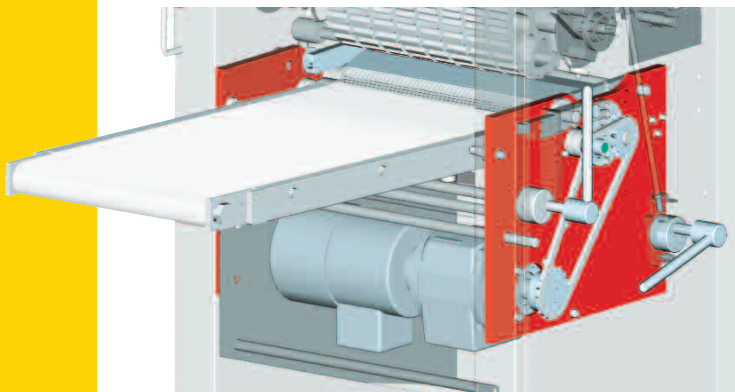

■ Long lasting precision

The NOCK POWER PLATES® guarantee an excellent bearing alignment and precise positioning of the machine parts. And thereby a constant better function of the machine.

NOCK POWER PLATE®

■ No material fatigue

When the highly strained parts of a derinding machine are positioned on the casing, sooner or later it can come to deformation or crevices. With a 15 mm thickness, the NOCK POWER PLATES® are resistant to material fatigue. This has been proven by thousands of NOCK machines since 1990 in the hardest industrial operation, even in several shift operation. They make the NOCK derinders especially sturdy and durable.

■ Service friendliness

All components are very easily accessible once the side covers are opened.

■ Hygienic and easy to clean machine surfaces

Due to the positioning of the machine components on the NOCK POWER PLATES®, the steel casing can be designed with large smooth surfaces. This makes the NOCK machines particularly hygienic and easy to clean.

→ 15 mm ←

The NOCK EASY-FLOW® safety cover

The covers of the NOCK conveyORIZED machines are constructed **similar to a tunnel:**

All machine parts which could obstruct the flow of the product, for example the mountings and handles of the blade holder, the mountings of the pressure device and of the conveyors, are located outside the tunnel-like safety cover.


The advantages:

- **Reliable product flow ("easy flow")**
= higher processing safety
- **Hardly any accumulation of surpluses on the mountings during processing** = better processing hygiene and faster cleaning of the machine

A safety switch stops the machine, once the cover is opened.

A gas pressure spring facilitates lifting and closing the safety lid.

The NOCK EASY-FLOW® safety cover complies to the European safety standard EN 12355 und bears to the high occupational safety of the NOCK derinders.

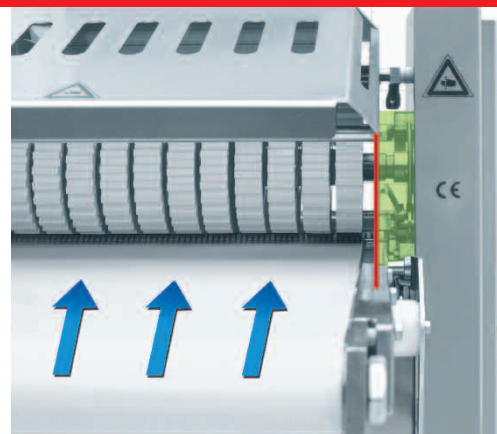

Interference-free product flow due to tunnel-like protection against machine parts

for the NOCK derinding machines



Quick cleaning and optimal hygiene

- The NOCK machines have not only a modern, but also a **hygienic design**, of course complying with the latest hygienic standards.
- Casing, conveyor frames, transport roller, blade holder and so on are made of **high quality stainless steel**. The conveyor belts and pressure wheels are made of approved food safe plastics.
- Due to the standard installed **NOCK POWER PLATES®**, it is possible that the machines can be designed with large smooth surfaces, which are particularly hygienic and easy to clean.
- The **NOCK EASY-FLOW®-safety cover** prevents a build-up of product surpluses on the mountings of the blade holder and the pressure unit during processing.
- All of the NOCK derinders except the table model Cortex C 420 are equipped with lockable castor rollers. This eases the transporting process to a cleaning area.



Quick and easy to clean:
NOCK derinder after removing conveyor, pressure roller and blade holder. Scraper comb tilted back.

Conveyors, pressure roller, blade holder, exchangeable tables and output sheets can be removed and replaced for cleaning purposes from the machine within seconds without any tools. Therefore soiled parts are easily accessible. The scraper comb can be tilted downwards, the transport roller can be turned by hand. The conveyor frames can be folded back so that the inside of the conveyor can be cleaned. The belts can also be easily removed from the frames for thorough cleaning. The machines can be optionally equipped with plastic modular belts.

Top operational safety also for open top machines

The NOCK IMMEDIATE CUT-OUT® (ICO) safety system practically eliminates the risk of injuries when working with open top derinding machines.



Top quality - Made in Germany

NOCK is an owner run German family business, which since 1990 constructs and and successfully sells modern machines for the meat processing industry worldwide. In close contact to meat processing plants and distributors, the machines are constantly further developed. Of course the latest hygiene and safety standards are respected.



F. Nock Ferdinand Nock, company founder

NOCK stands for uncompromising quality "Made in Germany". This begins with the quality-orientated concept and construction of the NOCK derinding machines, comprising of the manufacturing of all central components at the company-own ultra-modern machine park, exclusively using premium base materials and acquired parts, the collaboration with established suppliers, diligent assembling and final inspection of the NOCK machines. An experienced team of highly qualified and motivated employees also contributes significantly to this high quality standard. This results in modern, particularly reliable and durable machines of continuous quality.



NOCK offers German high class workmanship to interesting prices due to modular construction, modern production methods and strict cost management. This is an important aspect considering the often tightly calculated investment budgets of meat processing plants.



Derinding machines for automatic and open top operation

The conveyORIZED NOCK derinding machines for the small trade can be operated, in addition to automatic conveyORIZED operation also as an open top (manual) machine, to derind for example round pieces of ham. (Flat pieces must only be processed in conveyORIZED operation according to EN 12355.)

Besides this the machines are equipped with an in the height adjustable foot switch bar and an infeed table. In comparison to the industrial types, the slower speed setting simplifies processing on an open top machine.

The adjustment of the machine can take place in seconds without any tools:

Open the NOCK EASY-FLOW® safety cover – remove pressure roller and place it in the provided notch in the safety cover – remove infeed conveyor – mount infeed table – done.



Space saving construction

The conveyORIZED derinders for the small trade are constructed particularly compact, with shorter conveyors, so that barely any storage space is required.

The optionally available integrated NOCK product return system® allows that the machine can be placed up against a wall as the derinded product is automatically conveyed back to the operator.



Industrial-suited robustness

The NOCK conveyORIZED derinders for the small trade are in their sturdiness in comparison to the NOCK industrial type absolutely equal. They avail also of the 15 mm thick NOCK POWER PLATES®, which give them a particular stability and durability.

Options:

- Output conveyor
- Skin removal conveyor
- Integrated NOCK product return system®
- Inflated pressure balloon
- NOCK ICO® safety system
- Cleaning trolley / storage trolley



Cortex CB 435

- Cutting width: 430 mm
- Cutting speed: 24 m/min
- Particularly compact and good value derinding machine with middle length infeed conveyor
- Preferred operation in small to medium sized trades



Cortex CB 496

- Cutting width: 430 mm
- Cutting speed: 24 m/min
- Derinding machine with middle length infeed conveyor
- Pressure roller spring suspended and infinitely adjustable in height
- Universal operation in trades and industry plants

Automatic conveyORIZED derinding machines

The conveyORIZED NOCK derinding machines for industrial use are equipped with long conveyors and operate with high cutting speeds. They may not be operated in open top (manual) operation.



Cortex CB 509

- **Cutting width:** 500 mm
- **Cutting speed:** 31 m/min
- Good value, compact industrial machine with middle length conveyors
- Pressure roller is spring suspended and infinitely adjustable in height

Options:

- Skin removal conveyor
- Plastic modular belts
- Inflated pressure balloon
- NOCK ACTIVE SKIN GRIPPER® (ASG)
- Cleaning trolley / storage trolley



Cortex CB 501 SERRANO

- **Cutting width:** 500 mm
- **Cutting speed:** 31 m/min
- Derinding machine with 125 mm high throughput (for higher products upon request). Particularly suitable for derinding high products like air dried or smoked hams, loins etc. Perfect derinding results also with flat products.
- Determined de-fatting with optional quick-adjustment blade holder (pneumatic)

Options:

- Skin removal conveyor
- Plastic modular belts
- Pneumatic quick-adjustment blade holder for determined de-fatting
- Inflated pressure balloon
- NOCK ACTIVE SKIN GRIPPER® (ASG)
- Cleaning trolley / storage trolley



Cortex CB 519

Cortex CB 519 • CB 619 • CB 719

- **Cutting width:** 500 / 600 / 700 mm
- **Cutting speed:** 31 m/min
- Automatic conveyORIZED derinding machines with different cutting widths for the meat industry
- Long conveyors
- High cutting speed
- Pressure system with special geometry and spring detection for dynamic adaptation to products of different heights

Options:

- Suspended version for plant specific adaption
- Skin removal conveyor
- Skin removal conveyor from the side with separate drive
- Plastic modular belts
- Inflated pressure balloon
- Transfer plate for passage without processing
- NOCK ACTIVE SKIN GRIPPER® (ASG)
- Cleaning trolley / storage trolley

Open top derinding machines



Cortex C 420

- Cutting width: 430 mm
- Cutting speed: 19 m/min
- Open top derinding machine (table model) to derind round pieces, eg. round hams

Option: Underframe



Cortex C 460 • C 560

- Cutting width: 430 / 500 mm
- Cutting speed: 24 m/min
- Open top derinding machines (stand models) to derind large, round pieces, eg. round hams



Cortex C 660 • C 860

- Cutting width: 600 / 800 mm
- Cutting speed: 24 m/min
- Open top derinding machines with exchangeable tables to derind ham, shoulders and loins with bones

Cortex C 860 with exchangeable table for ham with bones

Cortex C 860 with exchangeable table for loins



Cortex C 560 DBD

- Cutting width: 500 mm
- Cutting speed: 24 m/min
- Open top machine to remove skin and fat simultaneously with dual blades ("double blade derinder")
- lower blade holder to separate skin from fat; blade gap 0 - 4.5 mm (infinitely adjustable with lateral handle)
- upper blade holder to simultaneously separate fat from meat; blade gap 0 - 40 mm (independently adjustable with crank handles right and left)

Option for all NOCK open top derinding machines

The NOCK IMMEDIATE CUT-OUT® (ICO) safety system

Function

- Immediately stops the machine when touching the blade
- Option for all NOCK open top derinders



Benefits

- Minimized risk of injuries
- Operator-friendly
- Proven and reliable system



Features + equipment / Derinding machines

Maschinentyp	Andruckwalze		open top (manual) operation possible	output conveyor	discharge conveyor for removed skin	NOCK ICO® safety system	NOCK ACTIVE SKIN GRIPPER® (ASG) ²	plastic modular belts	spring- suspended blade holder mounting	tooth roller with scraper comb	NOCK POWER PLATES®	NOCK EASY- FLOW® safety cover	lockable castors	stainless steel ³	particularly suitable for	
	gefedert	höhen- verstellbar													small trade	industry
Cortex CB 435	●		●	○		○		○	●	●	●	●	●	●	●	●
Cortex CB 496	●	●	●	○	○	○		○	●	●	●	●	●	●	●	●
Cortex CB 509	●	●		●	○		○	○	●	●	●	●	● ¹	●	●	●
Cortex CB 519	●	●		●	○		○	○	●	●	●	●	● ¹	●	●	●
Cortex CB 619	●	●		●	○		○	○	●	●	●	●	● ¹	●	●	●
Cortex CB 719	●	●		●	○		○	○	●	●	●	●	● ¹	●	●	●
Cortex CB 501 SERRANO	●	●		●	○		○	○	●	●	●	●	●	●	●	●
Cortex C 420			●			○				●				●	●	
Cortex C 460 C 560			●	○		○			●	●	●		●	●	●	●
Cortex C 660 C 860			●	○		○			●	●	●		●	●	●	●
Cortex C 560 DBD			●			○			●	●	●			●	●	●

Further options:

- Inflated pressure balloon
- NOCK Integrated Product Return System®
- Pneumatic quick-adjustment of blade holder (CB 501)
- Transfer plate for passing without derinding

standard

optional

- ¹ alternative: without underframe for integration in cutting lines
- ² requires compressed air
- ³ including of all rolling bearings

Technical data / Derinding machines

model	cutting width	cutting speed	maximum throughput height	blade gap	apply length on infeed conveyor	overall dimension W x H x D	infeed conveyor	output conveyor	weight	motor performance	electrical connection
Cortex CB 435	mm 430	m/min 24	mm 90	mm 0 - 5	mm 400	mm 800 x 1190 x 1660 / 1210 ¹	mm 850 x 425	mm 650 x 425	kg 225 / 210 ¹	kW 0.75	3 AC - 400 V - 50 Hz
Cortex CB 496	mm 430	m/min 24	mm 90	mm 0 - 5	mm 400	mm 800 x 1190 x 1860 / 1210 ¹	mm 850 x 425	mm 850 x 425	kg 240 / 220 ¹	kW 0.75	
Cortex CB 509	mm 500	m/min 31	mm 120	mm 0 - 5	mm 300	mm 865 x 1370 x 1900	mm 850 x 490	mm 850 x 490	kg 305	kW 1.1	
Cortex CB 519	mm 500	m/min 31	mm 120	mm 0 - 5	mm 520	mm 865 x 1370 x 2260	mm 1070 x 490	mm 1070 x 490	kg 310	kW 1.1	
Cortex CB 619	mm 600	m/min 31	mm 120	mm 0 - 5	mm 520	mm 965 x 1370 x 2260	mm 1070 x 590	mm 1070 x 590	kg 330	kW 1.1	
Cortex CB 719	mm 700	m/min 31	mm 120	mm 0 - 5	mm 520	mm 1065 x 1375 x 2260	mm 1070 x 690	mm 1070 x 690	kg 350	kW 1.1	
Cortex CB 501 SERRANO	mm 500	m/min 31	mm 125 ³	mm 0 - 5 ⁴	mm 520	mm 865 x 1350 x 2280	mm 1070 x 490	mm 1070 x 490	kg 285	kW 1.1	
Cortex C 420	mm 430	m/min 19	mm -	mm 0 - 4.5	mm -	mm 700 x 420 x 500	mm -	mm -	kg 70	kW 0.75	
Cortex C 460 C 560	mm 430/500	m/min 24	mm -	mm 0 - 4.5	mm -	mm 750 / 815 x 960 x 750	mm -	mm -	kg 150/180	kW 0.75	
Cortex C 660 C 860	mm 600/800	m/min 24	mm -	mm 0 - 4.5	mm -	mm 915 / 1115 x 980 x 750	mm -	mm -	kg 180/200	kW 1.1	
Cortex C 560 DBD	mm 500	m/min 24	mm -	mm 0 - 4.5 0 - 40	mm -	mm 815 x 1020 x 750	mm -	mm -	kg 190	kW 1.1	

- ¹ with / without optional output conveyor
- ² other voltages/frequencies upon request
- ³ higher throughput upon request
- ⁴ optional pneumatic quick adjustment (3 steps, e.g. 0 - 5 / 6 - 11 / 12 - 17 mm)



NOCK Maschinenbau GmbH
Industriestrasse 14
77948 Friesenheim
GERMANY

Tel: +49 (0) 7821-92 38 98-0
Fax: +49 (0) 7821-92 38 98-18
E-mail: info@nock-gmbh.com
www.nock-gmbh.com