



# JOS

a Jump Of Success



### Product Description

- 380 mm wide In-feed chamber for high volume work
- 7-inch touch screen
- Cutting thickness setting in 0.1mm increments
- Transparent safety door for easy viewing of work objects
- Safety sensors attached
- Compact size for better space utilization


### Product specification

Specification / function	JOS
Product size (L×W×H)	2400 × 1100 × 1420 (mm)
Input size (L×W×H)	600 × 380 × 200 (mm)
Processing capacity	max. 220 Slices/min
Cutting thickness	0 ~ 30 mm
Recommended temperature	-7 ~ -2 [°C]
Product weight	600 kg


**Option** Fork selection, automatic or manual

**Power specification option** Voltage adjustable upon request (country-specific changes)

### Detailed options

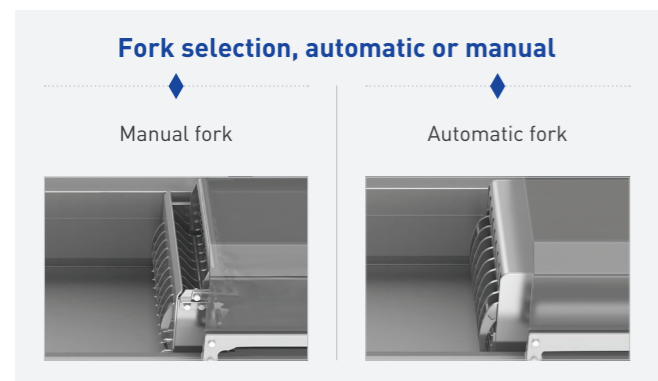

### Work processes

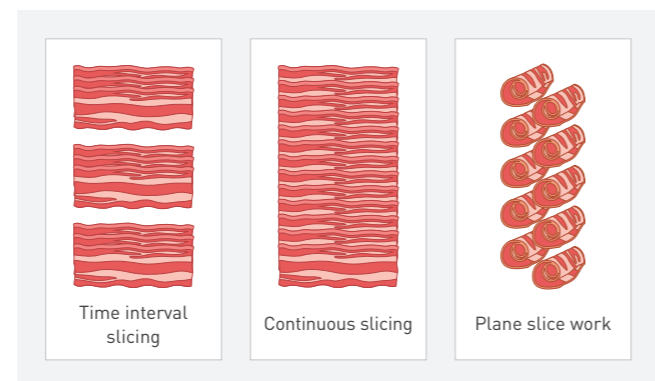

# CSM-20/30

Customer's Success Momentum



### Product Description


- 7-inch touch screen
- Cutting thickness setting in 0.1mm increments
- Equipped with removable shatter-proof plate
- Safety sensors attached
- Transparent safety door for easy viewing of work objects
- Fork travel range up to 670 mm

### Product specification

Specification / function	CSM-20
Product size (L×W×H)	1760 × 990 × 1400 (mm)
Input size (L×W×H)	720 × 300 × 200 (mm)
Processing capacity	max. 240 Slices/min
Cutting thickness	0 ~ 30 mm
Recommended temperature	-4 ~ -1 [°C]
Product weight	450 kg

**Power specification option** Voltage adjustable upon request (country-specific changes)

### Detailed characteristics

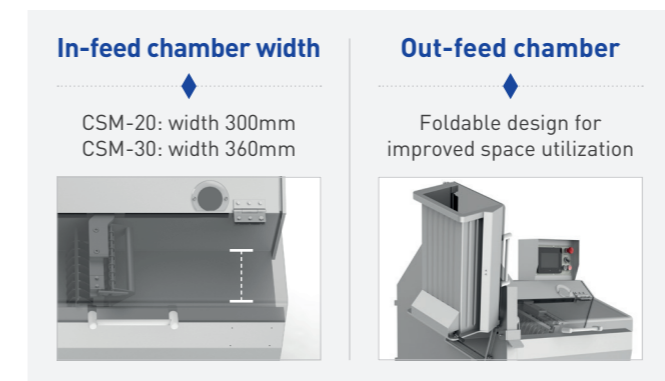

### Product specification

Specification / function	CSM-30
Product size (L×W×H)	1810 × 1100 × 1520 (mm)
Input size (L×W×H)	720 × 360 × 200 (mm)
Processing capacity	max. 240 Slices/min
Cutting thickness	0 ~ 30 mm
Recommended temperature	-4 ~ -1 [°C]
Product weight	500 kg